


ACCESSORY

Cable grommet white

Sleeve that protects the cable where it passes through a ceiling tile or an island: the edge cannot cut the cable and the hole is hidden.

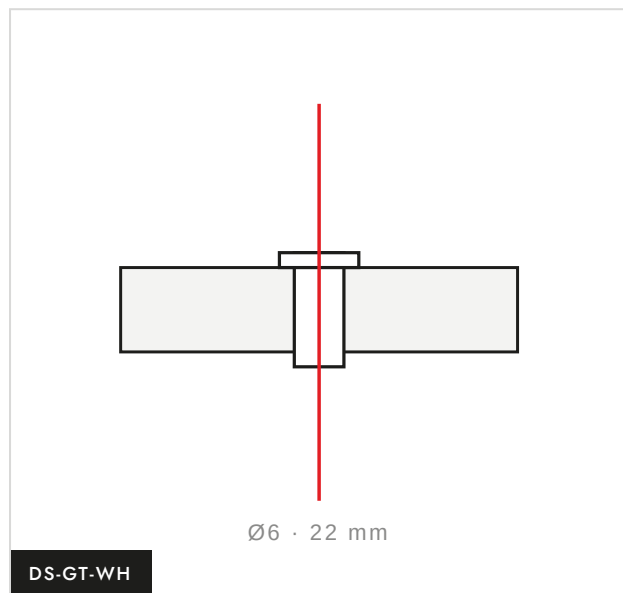

TECHNICAL DATA

Dimensions	$\text{Ø}6 \times 22 \text{ mm}$
Cable range	$\text{Ø}1.0 - 2.0 \text{ mm}$
Material	Polyamide
Finishes	White

INSTALLATION

1

Drill the tile or island with a 6 mm bit.

2

Press the grommet in until the flange sits flush.

3

Thread the cable: it is protected from the edge through the full thickness.

ORDER CODE

DS-GT-WH

Sold separately

DSUSPEND LABORATORY TESTS

Tensile test to failure	☐ PENDING
Slip under load	☐ PENDING
Salt spray ISO 9227	☐ PENDING
Adjustment cycles	☐ PENDING

SAFETY



Static loads only



No chlorine or corrosive areas



No grease or lubricants



Never use frayed cable



Maximum 60° inclination



Do not paint components

Provisional document: data will be completed with our laboratory tests. Images for reference only. Data subject to change without notice.